


ELECTRO INSUFLAIR

Float air injector for water with electronic operation

Technical Data Sheet

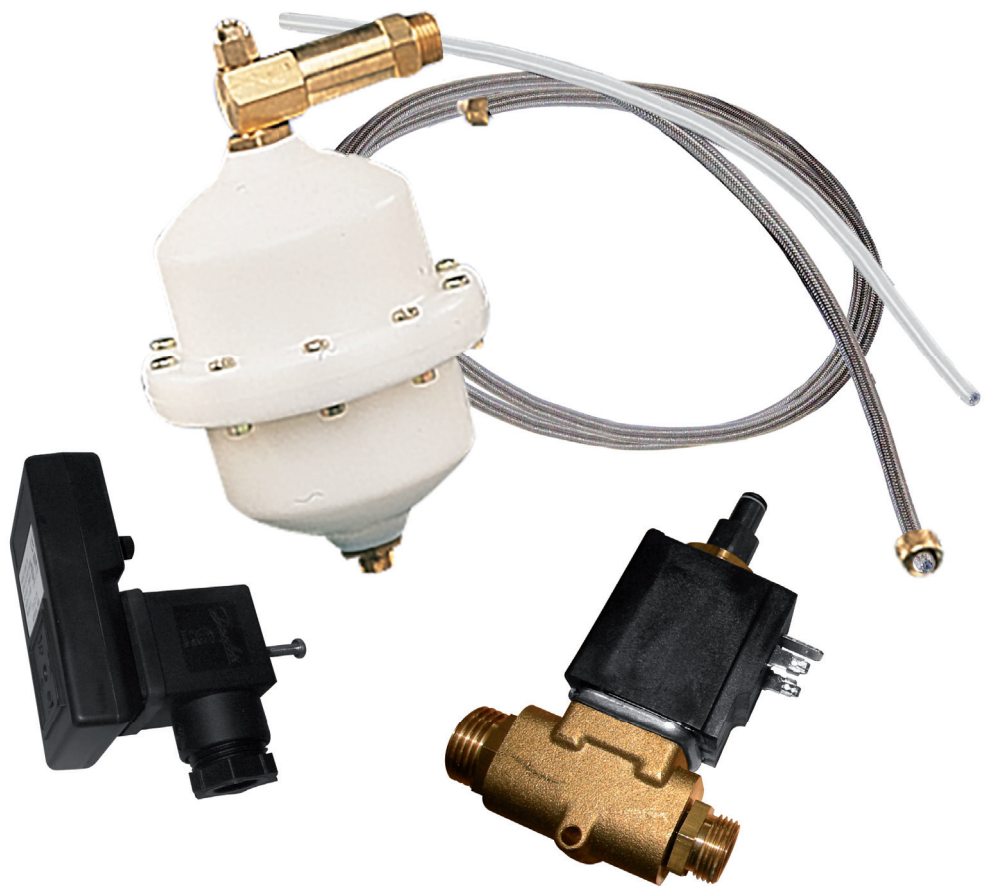

Description

- For pressure tank of 500 to 10000 liters.
- Complete supply with tube PA12 (polyamide) 8/10, a one metre hose, 3/2-way solenoid valve and equipped of a programmer.



ELECTRO INSUFLAIR

Float air injector for water with electronic operation

Type	Tank	Ref.
Electro insuflair	500 to 10000 L	149B5375

Technical features

Operating temperature	0 °C to 40 °C
Permissible operating pressure (PFA) in water	10 bar
Connection	Male 1/2, BSP threaded
Mediums	Clear liquids

Approvals

International construction Standards :

Thread connection NF EN ISO 228-1

The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Socla reserves the right to carry out any technical and design improvements to its products without prior notice. Warranty : All sales and contracts for sale are expressly conditioned on the buyer's assent to Socla terms and conditions found on its website at www.socla.com. Socla hereby objects to any term, different from or additional to Socla terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Socla.



A WATTS Brand

Socla sas

365 rue du Lieutenant Putier • 71530 Virey-Le-Grand • France

Tel. +33 03 85 97 42 00 • Fax +33 03 85 97 42 42

contact@wattswater.com • www.socla.com

ISO 9001 version 2015 / ISO 18001